

Roto-Centrifugal Barrel

As the turret rotates clockwise, the barrel rotates counter-clockwise. Work is completed with the double rotation generating centrifugal energy, which compresses the work pieces and abrasive media toward the peripheral direction of the wall.

DESIGN FEATURES:


- Removable barrels
- Process Timer
- Positive chain drive
- Self-contained
- Jog function
- NEMA 12 electric enclosure
- Rotation creates centrifugal high pressure work, which reduces process time
- Hinged lid for ease of maintenance
- Light weight composite barrels

OPTIONS


- Screen separator
- Extra barrels
- Figure 8 action
- Half barrels
- Variable Speed

SPECIFICATIONS

- 2 HP Brake motor
- 230 or 460 Volts, 3 Phase, 60 Hertz
- 1 cubic foot capacity
- Approximate shipping weight 1,445 lbs.

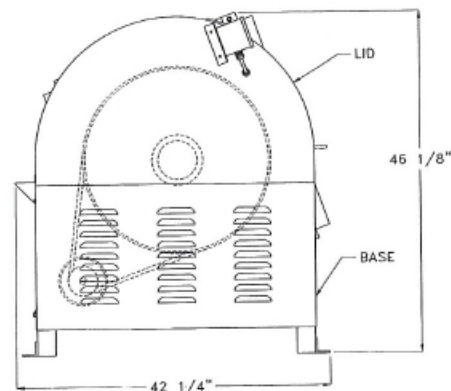

Side view of RCB-1

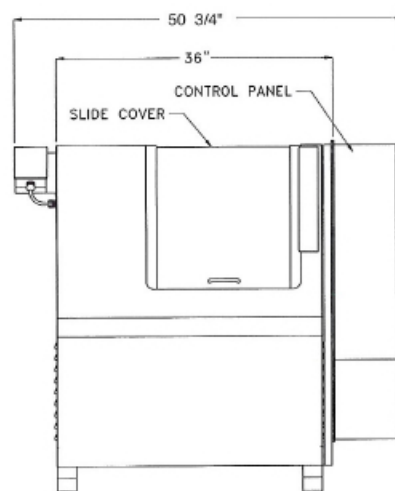

Front view of RCB-1

Inside Barrel Dimensions

<u>Model</u>	<u>Barrel I.D.</u>	<u>1/2 Barrel</u>
RCB-1	6.25" X 9.5"	6.25" X 3.5"

Continuous improvement of products is a standard policy.
All specifications and designs are subject to change without notice or obligation.
Prices are also subject to change and do not include taxes and freight where applicable.



Roto-Finish

1600 Douglas Avenue
Kalamazoo, MI 49007-1690
Phone: 269-345-7151
Fax:

DISTRIBUTED BY: